



Dodge Coil Spring Spacers – Installation Instructions

Before you begin

1. Read instructions in their entirety before installation. It is recommended that a trained technician perform this installation.
2. Check to make sure you have a complete list of parts and all the tools you need before installation.
3. Only install this kit on the vehicle it is intended for.
4. Park the vehicle on a suitable level surface. Block the tires and place the emergency brake on to prevent the vehicle from rolling in either direction.
5. Disconnect both battery cables starting with the positive, then the negative. Diesel vehicles may have two batteries to be disconnected.

Installation

1. Loosen front lug nuts. Lift the front of the vehicle so that the tires are off the ground. Place jack stands under each side of the frame in suitable positions.
2. Remove the front wheels.



4. Remove spring.
5. Place spacer on top of spring. You may have to grease the isolator to insert into the spacer.



3. Place jack stand under axle to provide support. Undo shock, lowering the axle onto the jack stand.




6. Re-place spring.





7. Lift the axle and reattach the shock.

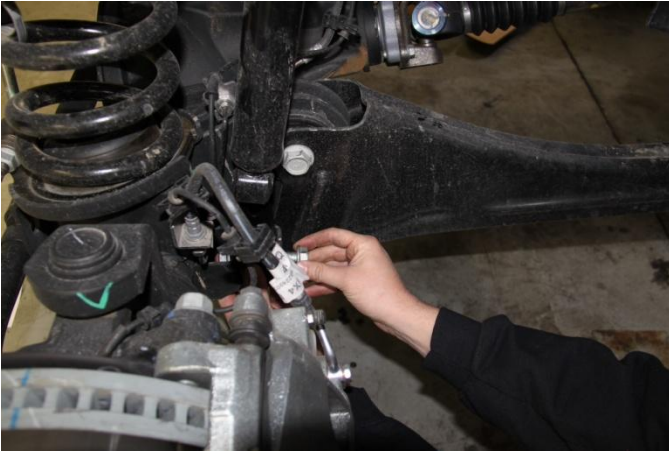

8. Repeat on opposite side.

9. Install wheel and torque lug nuts to factory specification.

10. Take vehicle directly to a shop to get an alignment

Image below of spacer installed

